
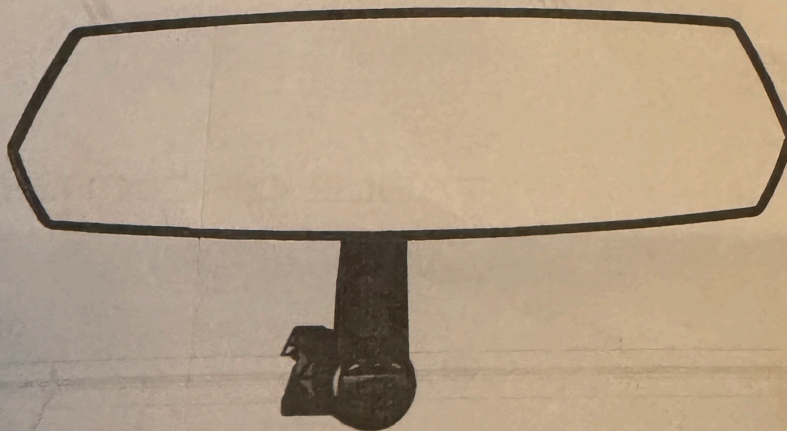


# NAUTIQUE

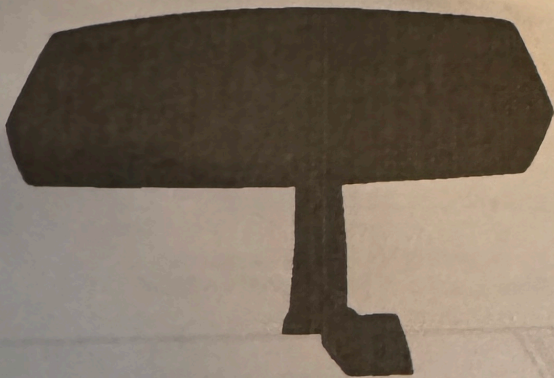

## Nautique 360 Mirror Mount and Roswell Mirror

---

Nautique 360 Mirror Clamp and Roswell Mirror Combo# C917-22420

Information: [info@roswellmarine.com](mailto:info@roswellmarine.com)  
Warranty: [warranty@roswellmarine.com](mailto:warranty@roswellmarine.com)

If you have any questions please call : 1-321-638-1331  
[www.roswellmarine.com](http://www.roswellmarine.com)

REV. 220307



# ROSWELL.

## Welcome to the Family.


We at Roswell started a revolution in the wakeboard industry back in 1998, and have since expanded into marine audio and other branches of the marine industry. Even now, over 20 years later, we continue to push the boundaries.

We are fully committed to going past industry expectations every day to make your boating experience more enjoyable. With the input of our dealers, team riders, and boaters around the world, our goal remains to redefine the marine industry day in and day out. We will not be confined to our desks; we are out on the water testing our full line of products to ensure your days on the water are as hassle-free and enjoyable as possible.

If you have any questions about your mirror or questions regarding installation, please contact your authorized Roswell dealer. If you have further questions, please don't hesitate to contact us directly at (321)-638-1331 or by emailing [info@roswellmarine.com](mailto:info@roswellmarine.com).

## TABLE OF CONTENTS

Features .....	03
Warnings .....	04
Contents .....	05
Installation .....	06
Operation .....	08

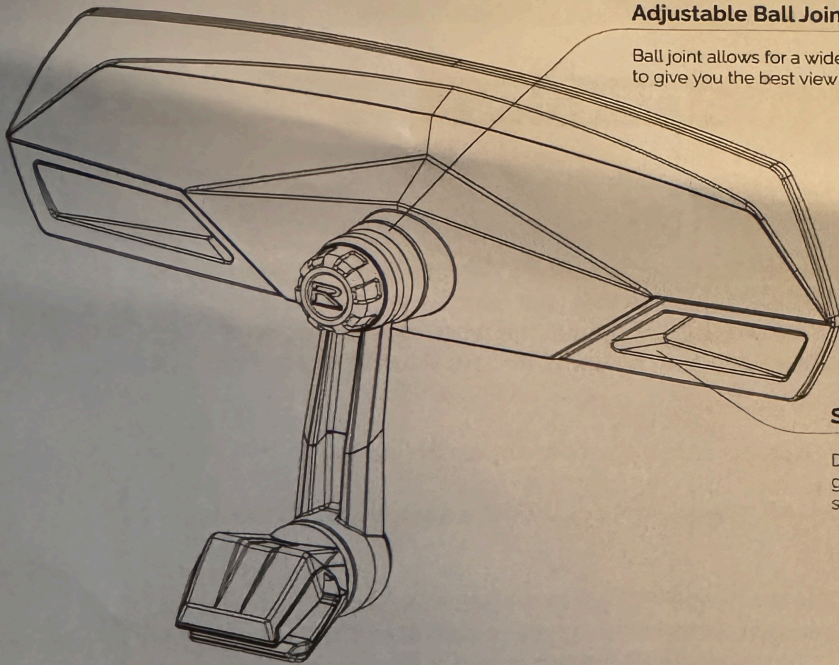


**Adjustable Ball Joint**

Ball joint allows for a wide range of twist and tilt adjustments to give you the best view of whats behind you.

**Side Pockets**

Dedicated, easy-grab areas give a confident grip while adjusting the mirror without leaving smudges on the mirror's surface.

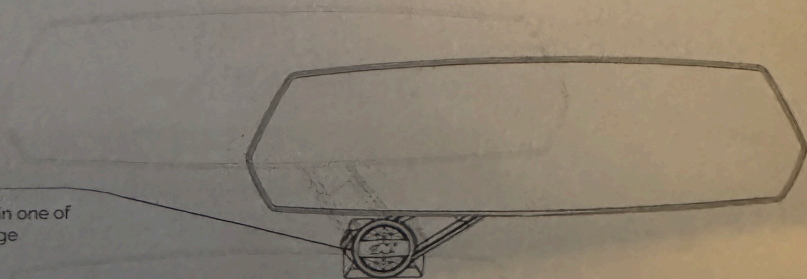

**360 Degree Range of Motion**


Allows you to securely position your mirror in one of 16 positions to improve visibility or for storage




**! ATTENTION !**

- Bolts and screws tend to rattle loose over time due to vibrations and shaking during normal boating, and in transit. Always check that your mirror is securely fastened by checking bolts for tightness before using your boat; we recommend keeping a set of Allen keys in your boat. If any bolts are found to be loose, remove them, apply red threadlock and re-tighten the bolts.
- Never hang off of the mirror or mirror mount under any circumstance.
- Be aware of your tow rope and make sure it doesn't get wrapped around the mirror or any other objects.
- NEVER USE CLEANERS ON YOUR MIRROR OR MIRROR'S HOUSING, The mirror has a plastic housing and cleaners can ruin the finish of your product. A mild soap and water combination can be used to remove traveling grime or water spots. Make sure you are using soft cloths to avoid scratches. Glass cleaner can be used to clean the mirror glass.


# Package Contents

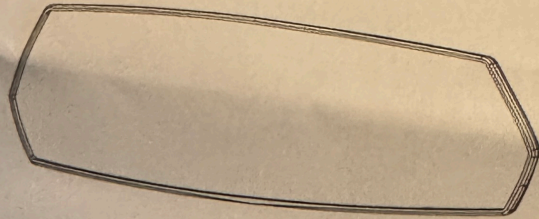


Roswell Mirror




1/4"-20 UNC x 1"

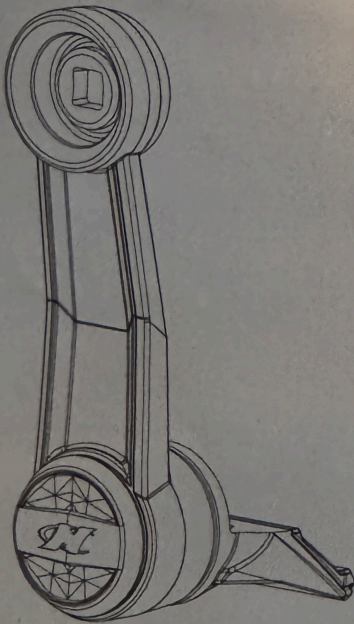


360 Mirror Clamp

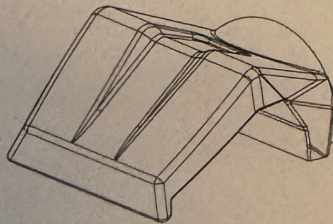


Upper Clamp



Hand Knob

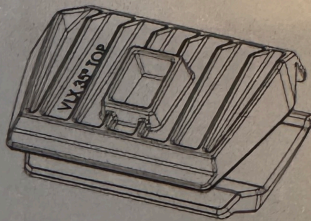

VLX 35° Inserts

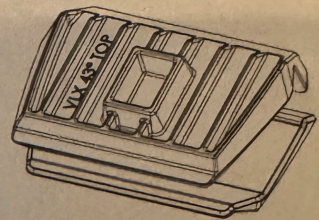


VLX 43° Inserts

# Tools Required




Red Threadlock



Allen Key 3/16

# Installation




1

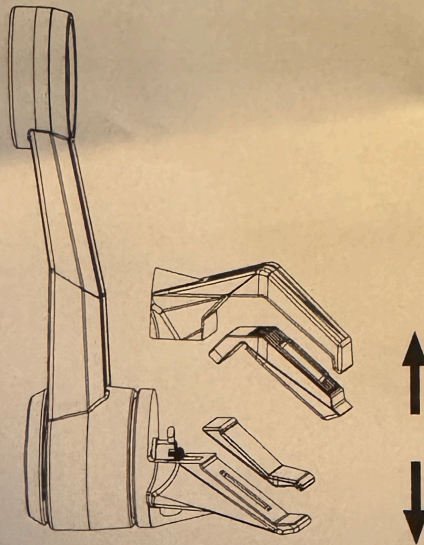

If you are installing your mirror on a Paragon Veralex windshield use the 35° VLX inserts. For all other Veralex windshields install the 43° VLX inserts as shown above.


2

Position the mirror clamp in the desired location on the windshield. Make sure the inserts are correctly aligned in the clamp and the upper clamp is aligned with the bottom clamp. Then install the (2) 1/4"-20 bolts with a 3/16" Allen key. Use red threadlocker.

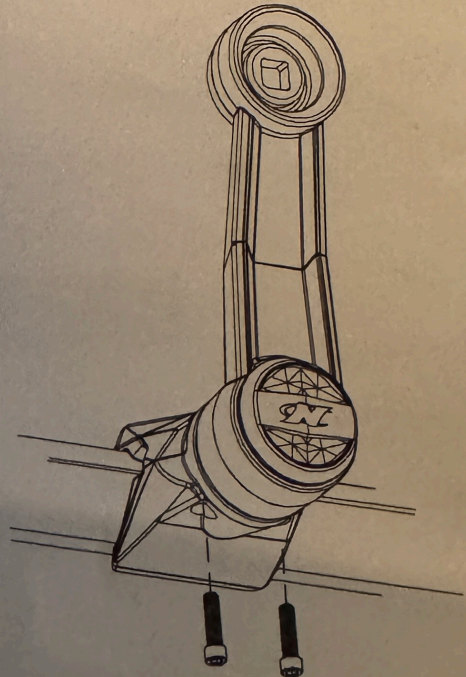




3

Unscrew the hand knob from the back of the mirror. Insert the threaded stud through the hole in the mirror arm and reinstall the hand knob as shown. Align the mirror to your liking, then firmly tighten the hand knob against the back of the mirror mount to tighten it in place. You may need to re-tighten this knob over time as you move and position the mirror. Your mirror is now installed!

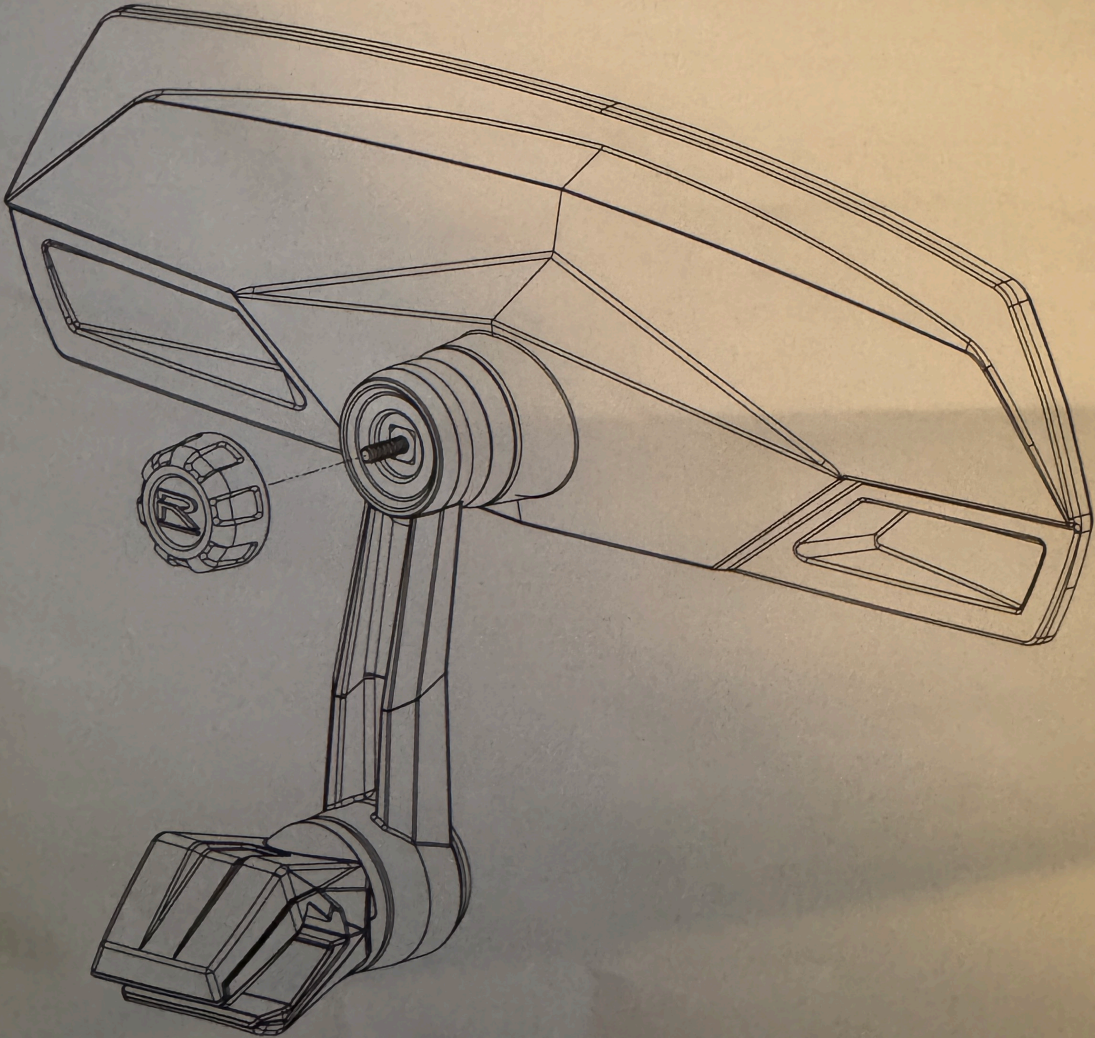

## Operation

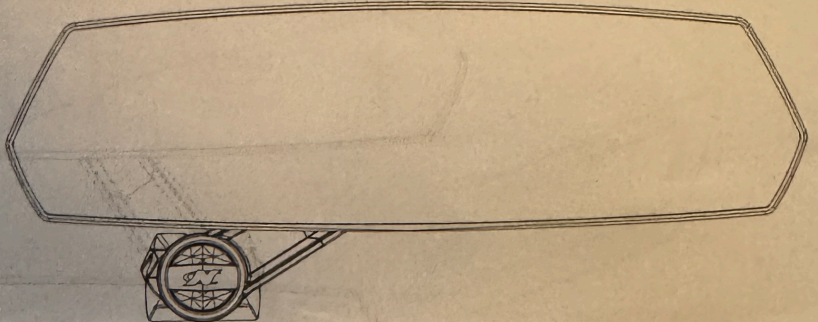

The mirror arm can be positioned in 16 different positions along its 360 degrees of travel. Simply move the arm to the desired position, and release. The mirror arm will securely hold its position where you leave it, allowing you to change your field of view at a moment's notice, or securely store it out of the way.